


Product Data Sheet



Type : Contactor EW
 Reference : EW025_

Main Contact:

Rated Insulation Voltage U_i (V)		660		
Rated Service Voltage (V)		660		
Thermal Current I_{th} AC1 (A)		35		
Rated Current cat. AC3 I_e	1P	110V	26,5	1,5
		220V	26	3
	3P	220/230V	27	7,5
		380/400V	26	11
		415/440V	21	11
		500V	21	11
		600V	19	11

Auxiliary Contact:

Rated Insulation Voltage U_i (V)		690	
Rated Service Voltage (V)		600	
Thermal Current I_{th} AC1 (A)		10/2.5	
Rated Current cat. AC3 I_e	AC 15	120V	6
		240V	3
		380V	1.9

Contactor Endurance:

Operations Freq.	Cycles / Hour	1200
Elect. Endurance	x 10000 cycles	100
Mech. Endurance	x 10000 cycles	1000


Coils:

Coils	Inrush (VA)	70
	Rated (VA)	8,3
	Power Loss (W)	4

Others:

Auxiliary Contacts	1NA + 1NF
Weight (Kg)	0,4

Dimensions (mm):

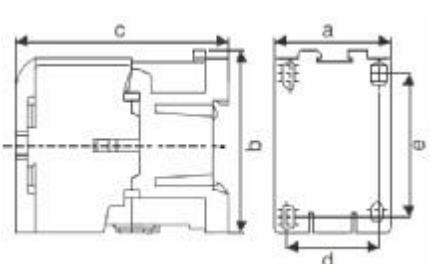	a	55
	b	72
	c	92
	d	45
	e	55