279






UPC Code: 07847707468

Country of Origin: Please Contact Customer Service

NEMA: 14-50R



Straight Blade Wiring Devices

Brand Features

Built of durable thermoplastic, Leviton Power Receptacles — come equipped with heavy-gauge, double-wire copper alloy contacts. To ensure correct and speedy wiring, terminals have ID markings.

Item Description

50 Amp, 125/250 Volt, NEMA 14-50R, 3P, 4W, Flush Mtg Receptacle, Straight Blade, Industrial Grade, Grounding, , Side Wired, Steel Strap, - Black

Technical Information

AC Horsepower Ratings At Rated Voltage: 3 HP

Electrical Specifications

Grounding: Grounding Amperage: 50 Amp Voltage: 125/250 Volt NEMA: 14-50R Pole: 3 Wire: 4 Dielectric Voltage: Withstands 2000V per UL498 Current Limiting: Full Rated Current Temperature Rise: Max 30C after 50 cycles OL at 150 percent rated current

Environmental Specifications Flammability: Rated V-2 per UL94

Operating Temperature: -40C to 60C

Material Specifications Face Material: Nylon Body Material: Nylon Line Contacts: Brass Double-Wipe Strap Material: Galvanized Steel Color: Black

Mechanical Specifications **Terminal ID:** Brass-Hot, Green-Ground, White-Neutral

Terminal ID: Brass-Hot, Green-Ground, Silver-Neutral

Terminal Accom.: Up to 4 AWG Product ID: Ratings are permanently marked on device


Product Features NEMA: 14-50R Color: Black

COLOR: DIACK


Standards and Certifications

NEMA: WD-6 ANSI: C-73 UL498: File E13399 CSA C22.2 No. 42: File 152105 NOM: 057 Warranty: 10 Year Limited



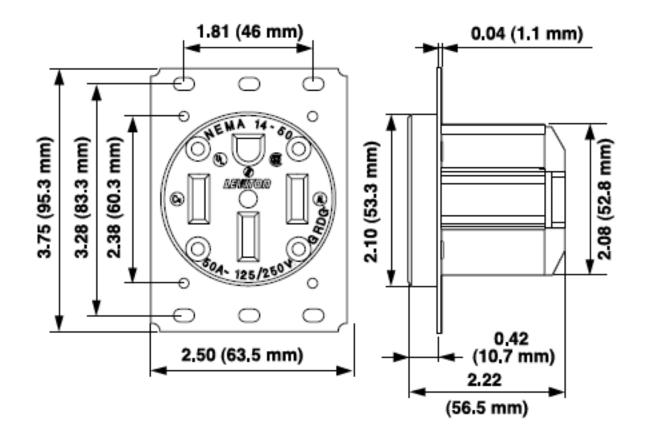

Wiring Diagram



SPECIFICATION SUBMITTAL

JOB NAME:	CATALOG NUMBERS:	
JOB NUMBER:		

Leviton Manufacturing Co., Inc. 201 North Service Road, Melville, NY 11747 Telephone: 1-800-323-8920 · FAX: 1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): 1-800-824-3005

Leviton Manufacturing of Canada, Ltd. 165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: 1-800-469-7890 · FAX: 1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V. Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com © 2012-2015 Leviton Manufacturing Co., Inc. All rights reserved. Subject to change without notice.

Leviton has a global presence. If you would like to know where your local Leviton office is located please go to: www.leviton.com/international/contacts/

